


## RG30 Regulator

The RG30 is a compact, spring-operated regulator normally used to supply air or gas to pilots, positioners or other pneumatic controls.

It features an internal relief to help maintain an accurate downstream pressure, rugged aluminum housing construction with dual outlets and a built-in micron filter.

## Dimensions

Measurements in inches (mm).

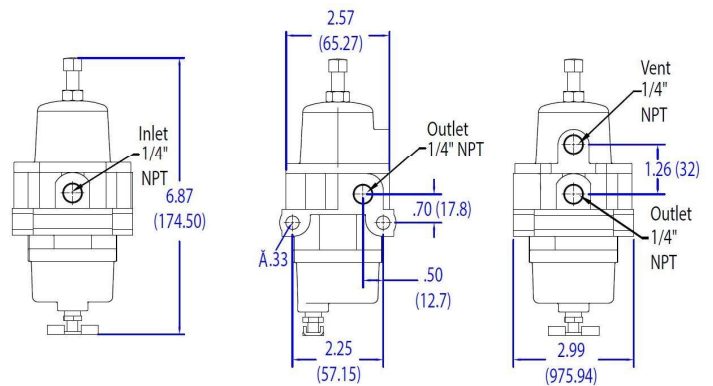

## Specifications

**Connection:** 1/4" NPT

**Temperature Range:** -20° F to 180° F (-29° C to 82° C)

**Inlet Pressure Rating:** 250 psi

**Output Ranges:**

0 – 30 psi

0 – 60 psi

0 – 120 psi

**Body and Housing Material:** Die Cast Aluminum

## Capacities in SCFH of .6 SG Natural Gas

Inlet Pressure (psi)	Outlet Pressure Setting (Spring Range)		
	25 psi (0-30)	40 psi (0-60)	80 psi (0-120)
50	516	194	-
75	710	645	-
100	968	645	516
150	1290	903	839
250	1806	1806	1290

## How to Order

Model Number	Spring Range
RG30-1	0-30 psi
RG30-2	0-60 psi
RG30-3	0-120 psi